


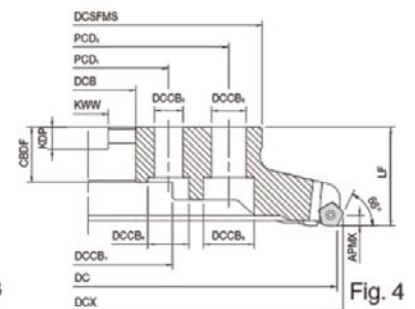



## TOTIME MFPN glodače glave za čeono glodanje

**Promjeri rezanja od Ø50 do Ø250**  
**Smanjena sila rezanja**  
**Stabilno i ekonomično čeono glodanje**



Čeono i kutno glodanje



	Promjer oštrice D (mm)	Promjer stabla d (mm)	Ukupna dužina H (mm)	Broj zuba Z
MFPN66050R-4T-M	50	48	40	4
MFPN66063R-5T-M	63	48	40	5
MFPN66080R-6T-M	80	70	50	6
MFPN66100R-7T-M	100	78	50	7
MFPN66125R-9T-M	125	89	63	9
MFPN66160R-11T-M	160	89	63	11
MFPN66200R-13T-M	200	140	63	13
MFPN66250R-15T-M	250	140	63	15

	Preporučeni parametri rezanja	Fz (mm/t) Ap=0,5mm	Kvaliteta TG4025 Vc (m/min)	Kvaliteta TG4035 Vc (m/min)
Ekonomična pločica PNMU0905XNER za opću namjenu s 10 reznih oštrica	P	Ugljični čelik	0.2 - 0.7 - 1.2	★ 120 - 220
		Legirani čelik	0.2 - 0.7 - 1.2	★ 120 - 220
		Kovani čelik (do 50 HRC)	0.2 - 0.4 - 0.6	★ 100 - 160
UG lomač za obradu čelika	M	Austenitni nehrđajući čelik	0.2 - 0.5 - 0.9	☆ 100 - 160 - 200
		Martenzitni nehrđajući čelik	0.2 - 0.5 - 0.9	★ 100 - 200
		Precipitacijom očvršnuti nehrđajući čelik	0.2 - 0.5 - 0.9	★ 80 - 160
SG lomač za obradu inoxa				

TG4025 kvaliteta prvi izbor obradu čelika

TG4035 kvaliteta prvi izbor obradu inoxa

★ prvi izbor